


# BPL32-LP

## Interface 32 output for PLC.

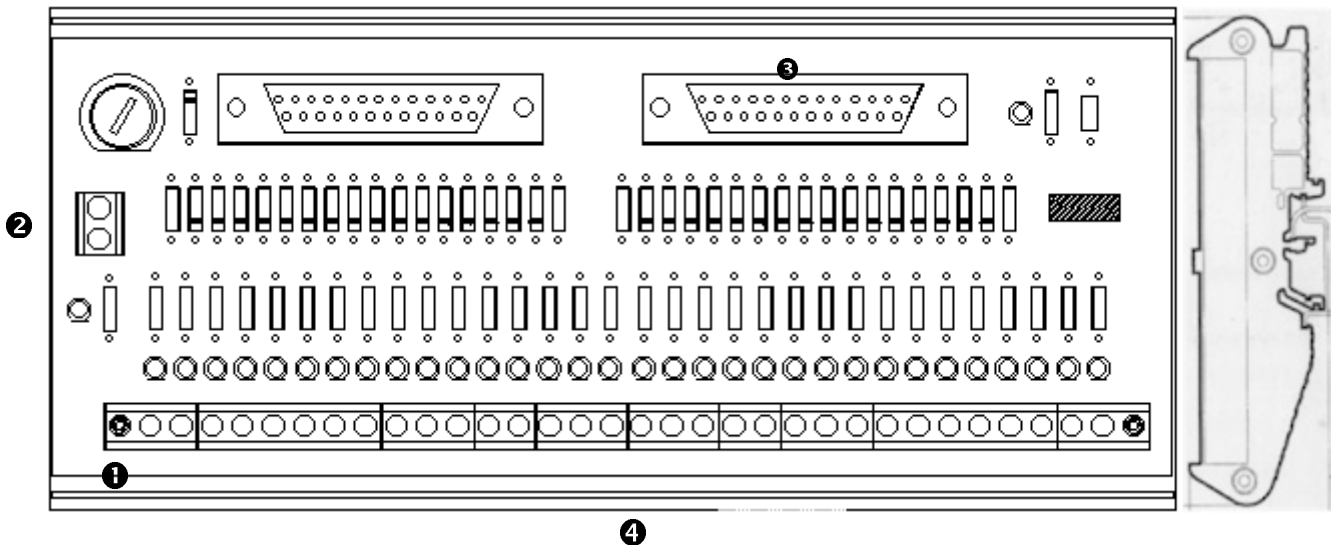

### Main features :

- **Power :** ❶ 24 Vcc (fuse 315mA) .
- **Alarm Output :** ❷ ON-24V to indicate the encoder connected and output OK. OFF to indicate encoder or output failed.
- **Input signals :** ❸ 24V PnP

Pin 1	GND	Pin 9	out 6 / 22	Pin 18	out 10 / 26
Pin 2	n.c.	Pin 10	out 4 / 20	Pin 19	24Vcc
Pin 3	out 15 / 31	Pin 11	out 2 / 18	Pin 20	24Vcc
Pin 4	out 13 / 29	Pin 13	GND	Pin 21	out 7 / 23
Pin 5	out 11 / 27	Pin 14	GND	Pin 22	out 5 / 21
Pin 6	out 9 / 25	Pin 15	out 16 / 32	Pin 23	out 3 / 19
Pin 7	24Vcc	Pin 16	out 14 / 30	Pin 24	out 1 / 17
Pin 8	out 8 / 24	Pin 17	out 12 / 28	Pin 25	GND

- **Output :** ❹ 1 to 32 - 24V - PnP . Max 500mA (ref. to CAM PROGRAMMER output)
- **Dimension mm. H/L:** 82 x 185