


BPL16-LP

Interface 16 output for PLC.

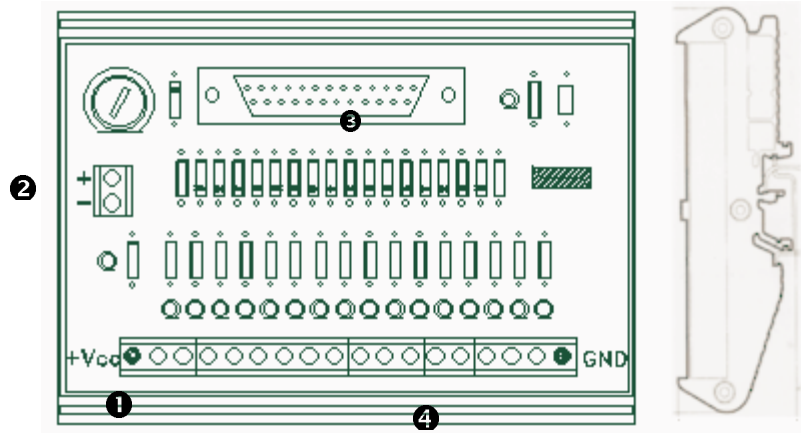

Main features :

- **Power :** ❶ 24 Vcc (fuse 315mA) .
- **Alarm Output :** ❷ ON-24V to indicate the encoder connected and output OK. OFF to indicate encoder or output failed.
- **Input signals :** ❸ 24V PnP

Pin 1	GND		Pin 9	out 6		Pin 18	out 10
Pin 2	n.c.		Pin 10	out 4		Pin 19	24Vcc
Pin 3	out 15		Pin 11	out 2		Pin 20	24Vcc
Pin 4	out 13		Pin 13	GND		Pin 21	out 7
Pin 5	out 11		Pin 14	GND		Pin 22	out 5
Pin 6	out 9		Pin 15	out 16		Pin 23	out 3
Pin 7	24Vcc		Pin 16	out 14		Pin 24	out 1
Pin 8	out 8		Pin 17	out 12		Pin 25	GND

- **Output :** ❹ 1 to 16 - 24V - PnP . Max 500mA (ref. to CAM PROGRAMMER output)
- **Dimension mm. H/L:** 82 x 115